

LS-308

QUICK START GUIDE

EXTEND YOUR WARRANTY FREE!

Your new LS-308 comes with a 1 year warranty. Want to double it? Register your new microphone within 30 days of purchase at: LautenAudio.com/Register

CAPSULE & REJECTION

Internally shock mounted 32mm capsule with 270 degrees of off-axis rejection.

NOTE: Point the silver side of the microphone at your sound source.

HIGH-FREQUENCY SOUND SHAPING

 The flat setting is robust and full with a warm top end.

 The 10kHz setting is smooth and round with a gentle top end.


 The 8kHz setting is deep and dark with a ribbon-like top end.

+48V

PHANTOM POWER

Your new LS-308 requires 48 Volts of Phantom Power to work.

CRITICAL NOTE: We use physics to reject off-axis sounds, and traditional mic placement **will not work**. Experiment with position and distance to get the most out of your LS-308.

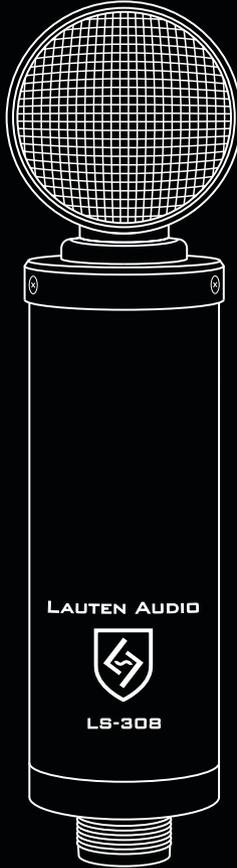

SPL & DYNAMIC RANGE


Your LS-308 is designed to withstand up to 135dB of SPL without a pad and provides 135dB or more of dynamic range.

LOW-FREQUENCY SOUND SHAPING

The flat setting captures the full low-frequency extension of a sound. 

The 50Hz setting naturally reduces low-end and boominess. 

The 120Hz setting increases clarity and perceived high frequencies. 



SECOND-ORDER CARDIOID

LS-308 APPLICATIONS



TOMS
LP Flat / HP 50Hz



KICK
LP 8kHz / HP Flat



ELECTRIC GUITAR
LP 10kHz / HP 50Hz



BASS
LP Flat / HP Flat