



SR20sp GEN 2

STEREO PAIR OF

DRUM OVERHEAD MICROPHONES

Follow us on social media @EarthworksAudio

For more information, please visit

earthworksaudio.com or call 1-603-654-2433.

EARTHWORKS AUDIO



Thank you for purchasing the Earthworks SR20sp Drum Overhead Microphones

Found with the biggest names in music and on the biggest stages in the world — Earthworks drum mics are truly game-changing.

From all of us at Earthworks Audio, thank you for making us a part of your creative journey.

YOUR PURCHASE INCLUDES

- 2 SR20 Gen 2 Microphones
- 2 Microphone Clips
- 2 Microphone Bags
- 2 Foam Windscreens

GETTING STARTED

The SR20 Gen 2 microphones capture excellent sound as soon as they are set up.

To get started with your SR20s, simply insert the microphones into their included clips.

Mount the mics and clips onto mic stands. Then plug XLR cables into your mics, and connect the other ends to your audio interface.

Finally, turn on phantom power on your audio interface. That's it!



PROPER MAINTENANCE

To guarantee your microphone provides years of performance, follow these guidelines:

- Avoid touching the front protective screen.
- Never attempt to disassemble the microphone.
- Avoid extreme heat and condensing humidity. Allow the microphone to warm up when bringing it in from the cold.
- Rough handling may damage the microphone even if no markings are visible

TROUBLESHOOTING

If you encounter issues while using your Earthworks Audio microphone, please make sure that:

- Your microphone is connected to an active power supply.
- Phantom power is being supplied to the microphone.
- Your microphone and XLR cable are well connected.
- The microphone is positioned at an appropriate distance from the sound source.
- External noise in your recording environment is kept to a minimum.
- Your recording space is at room temperature and free of dust.

If your issue persists after checking, please contact us via our website.



SPECIFICATIONS

Frequency Response

20Hz - 20kHz

Polar Pattern

Cardioid

Sensitivity

-50 dBV/Pa (3.2 mV/Pa)

Power Requirements

48V, 6mA

Max Acoustic Input

155 dB SPL

Output

XLR

Minimum Load

Impedance

1kOhm

Self-Noise

25 dB SPL (A-Weighted)

Dimensions For

Each Microphone


4.14 in x 0.860 in / 105.15 mm x 21.84 mm

Combined Weight


0.50 lbs / 0.23 Kg



Frequency (Hz)
125
250
500
1000

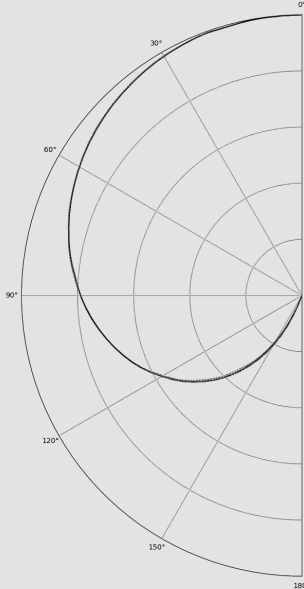

Frequency (Hz)
2000
4000
8000
16000

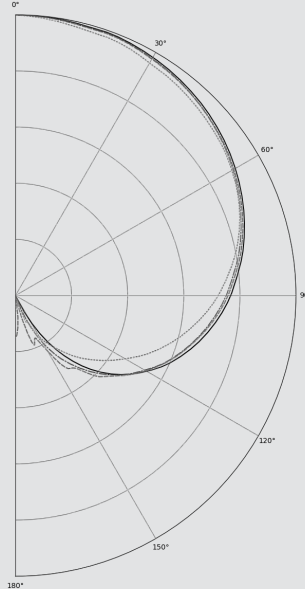



COMPLIANCE REQUIREMENTS

Hereby, Earthworks Inc. declares that this product has been determined to be in compliance with UKCA requirements.

The full text of the UK declaration of conformity is available at the following site:

<https://earthworksaudio.com/support/documents/uk>

Hereby, Earthworks Inc. declares that this product has been determined to be in compliance with European Union requirements.

The full text of the EU declaration of conformity is available at the following site:

<https://earthworksaudio.com/support/documents/eu>

WARRANTY

All Earthworks® products carry a limited warranty (parts and labor). Please register your warranty at: earthworksaudio.com/register. If you have any problems with your Earthworks products, please contact our warranty/repair department by email at: service@earthworksaudio.com.

NOTE

This warranty only applies to Earthworks microphones purchased brand new. For microphones purchased/received second-hand, please contact us via our website.