

# MD 441 U




## MD 441 U Microphone

The MD 441 U is a microphone of exceptional quality: its acoustic properties come as close as possible to those of a condenser microphone. Accurate signal response and low distortion are ensured, even with the highest sound pressure levels. Surface: all metal body with black simulated leather finish, sound inlet basket: nickel plated


### Features—Benefits

- Excellent feedback rejection
- Excellent sound quality
- Spring capsule mounting—low sensitivity to handling noise
- Hum compensating coil—reduces electrical interference
- Five position bass roll-off switch—compensates for proximity effect
- Brilliance (treble boost) switch—added speech intelligibility
- Integral pop filter

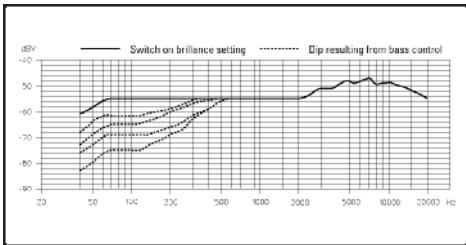

### Technical Data

Pick-up pattern	super-cardioid
Frequency response	30–20,000 Hz
Sensitivity (free field, no load) (1 kHz)	1.8 mV/Pa ± 2 dB
Nominal impedance	200 Ω
Min. terminating impedance	1 k
Dimensions in inches	10.63 x 1.3 x 1.4
Weight	approx. 15.87 oz

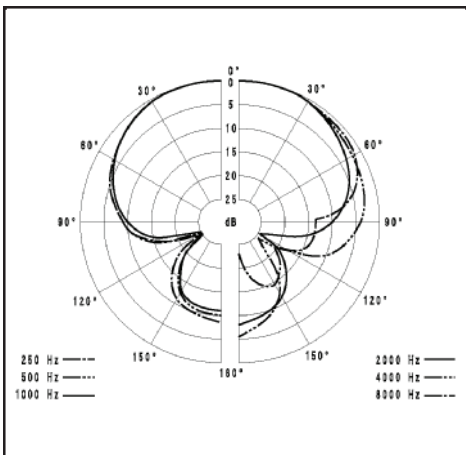

### Optional Accessories

Locking stand adapter	MZA 441
21' XLR microphone adapter	MC21N
Foam windshield	MZW 441

### Optional Accessories

1 Flexible stand adapter	MZQ 441
--------------------------	---------

### Architect's Specifications

Super-cardioid studio microphone, hum compensating coil, five position bass control, brilliance switch, integral pop filter, frequency response 30–20,000 Hz, sensitivity (free field, no load) 1.8 mV/Pa ± 2 dB at 1 kHz, nominal impedance 200 Ω, min. terminating impedance 1 k, dimensions 270 x 33 x 36 mm, weight approx. 450 g.